COMBOLIGHT® COMBO CLASSIC RECESSED

LAMP GROUP 1 - CONFIGURATION "C"

TWO (2) Halogen lamp cells - TWO (2) Fluorescent lamp cells

New Construction Recessed Housing - Trim or Trimless

Catalog #

Type

Project

DESCRIPTION:
An adjustable recessed fixture suitable for multiple downlighting applications with one point of electrical entry. Mixes the use of low voltage halogen lamps with fluorescent lamps. Powder coat finish on housing & lamp assembly.

CONSTRUCTION:
Housing, Plaster Frame & Trim Assembly: 18 gauge CRS. J-Box Assembly: 16 gauge CRS (galvanized). Fixture is offered with a .75" ceiling trim or as a trimless fixture. Can accommodate 0.50" to 1.00" ceiling thickness.

LAMP ASSEMBLY:
Two low voltage halogen lamp cells with two fluorescent lamp cells . Can accept up to two optical accessories. 380º x 45º locking lamp adjustment. Provides 45º visual cut-off.

SYSTEM PROTECTION:
Thermal protection provided to guard against overheating, and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation

ELECTRICAL:
Fixture is two circuit.
Circuit 1: Integral electronic transformer for low voltage lamps. Fused and short circuit protection. Dimmable.

Circuit 2: Integral electronic ballasts for fluorescent lamps. **Lutron® dimming ballasts available upon request.**

Junction box is UL listed for through branch wiring, for 8 #12, 90°C supply conductors or 60°C for end of run (access above ceiling not required).

Made in the USA.

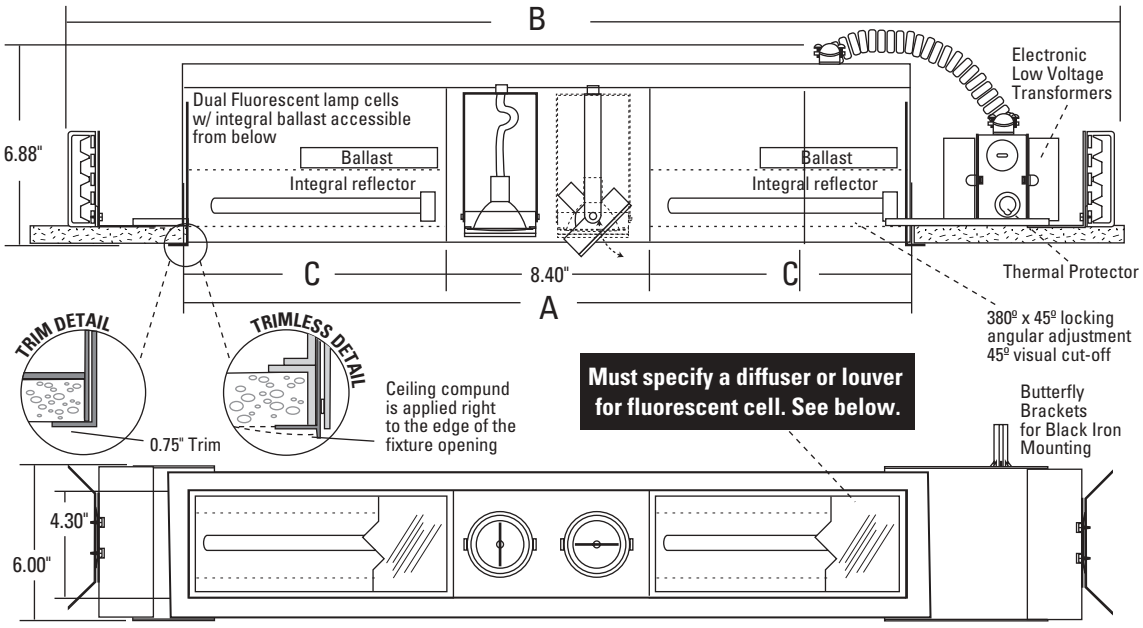

Custom configurations are available with Combo Classic fixtures.
Also available with T8 fluorescent lamps. Consult RSA for details

c UL us

Fluorescent >>		BX40	BX50	PLL80	PLT26	PLT32	PLT42	T528	T535	T5HO39	T5HO54
Lamp Group 1	A	59.78"	59.78"	59.78"	24.78"	25.78"	27.78"	106.78"	130.78"	82.78"	106.78"
	B	71.58"	71.58"	71.58"	35.58"	40.08"	39.58"	118.58"	142.58"	94.58"	118.58"
	C	25.50"	25.50"	25.50"	8.00"	8.50"	9.50"	49.00"	61.00"	37.00"	49.00"

ORDERING EXAMPLE:

CR11650	C	BX40	BK	WH	120

= Two MR16 50W lamps with Two BIAX® 40W Fluorescent • Double Wide • • Black Interior • White Trim • 120 volts

Optional Accessories - See RSA Combo Classic accessory page for details.

Baffle	Snoots	Louvers	Lenses

Fluorescent Diffusers and Louvers - Please specify

❑ **TWD** - Textured White Diffuser	❑ **CB1** - 2" Parabolic Louver
❑ **MPD** - Conical Prism Diffuser	❑ **CB2** - 1" Parabolic Louver

Item # / Lamp Type		Configuration	Fluorescent Lamp Cell	Interior Finish	Trim Finish	Voltage
Lamp Group 1	**CR11650** - MR16 12V 50W	**C** - Two Low Voltage Halogen lamp cells with Two Fluorescent lamp cells	**BX40** - 40W BIAX®	**BK** - Black	**BK** - Black	**120** - 120 Volts
	CR11675 - MR16 12V 75W		**BX50** - 50W BIAX®	**WH** - White	**WH** - White	**277** - 277 Volts
	CR17020 - AR70 12V 20W		**PLL80** - 80W PL-L	**S** - Silver	**S** - Silver	
	CR17050 - AR70 12V 50W		**PLT26** - 26W PL-T	**PT** - Custom	**PT** - Custom	
			PLT32 - 32W PL-T		**TR** - Trimless	
			PLT42 - 42W PL-T			
			T528 - 28W T5			
			T535 - 35W T5			
			T5HO39 - 39W T5HO			
			T5HO54 - 54W T5HO			

T8 lamps also available

SPECIFY -	____	C	____	____	____	____

RSA LIGHTING®

RSA LIGHTING LLC 9660 - 9700 TOPANGA CANYON BLVD. CHATSWORTH CA. 91311
TOLL FREE: 800-356-3030 • 818-349-3030 • FAX: 818-349-3031 • www.rsalighting.com
©2003 RSA Lighting LLC All Rights Reserved • Specifications subject to change without notice.